



MODEL:HU10255MI

Element Configuration : Hollow Fiber, Both Open-Ended

SPECIFICATION

Product Flow Rate	Nominal	95.0 m ³ /D
	Minimum	90.0 m ³ /D
Salt Rejection* ¹	Nominal	99.6%
	Minimum	99.4%
Test Conditions	Feed water, NaCl Solution	35,000 mg/L
	Pressure	5.39 MPa
	Temperature	25 deg.C
	Recovery	30%
Operating Conditions	Maximum Pressure	6.86 MPa
	Temperature Range	5 - 40 deg.C
	Brine Flow Rate* ²	75 – 350 m ³ /D
Feed Water Qualities	Maximum Fouling Index (SDI ₁₅)	4.0
	pH Range* ³	3 – 8
	Maximum Residual Chlorine* ⁴	1.0 mg/L

*1 The salt rejection defines the product quality, being indicated in the following formula
$$(1 - (\text{salt concentration in product water}) / (\text{salt concentration in feed water})) \times 100$$


*2 The brine flow rate range is limited by the quality and the temperature of the feed water

*3 pH is limited by the quality and the temperature of feed water

*4 Residual chlorine is limited by the quality and the temperature of feed water

The above specifications are understood to be subject to change without prior announcement.

DIMENSIONS

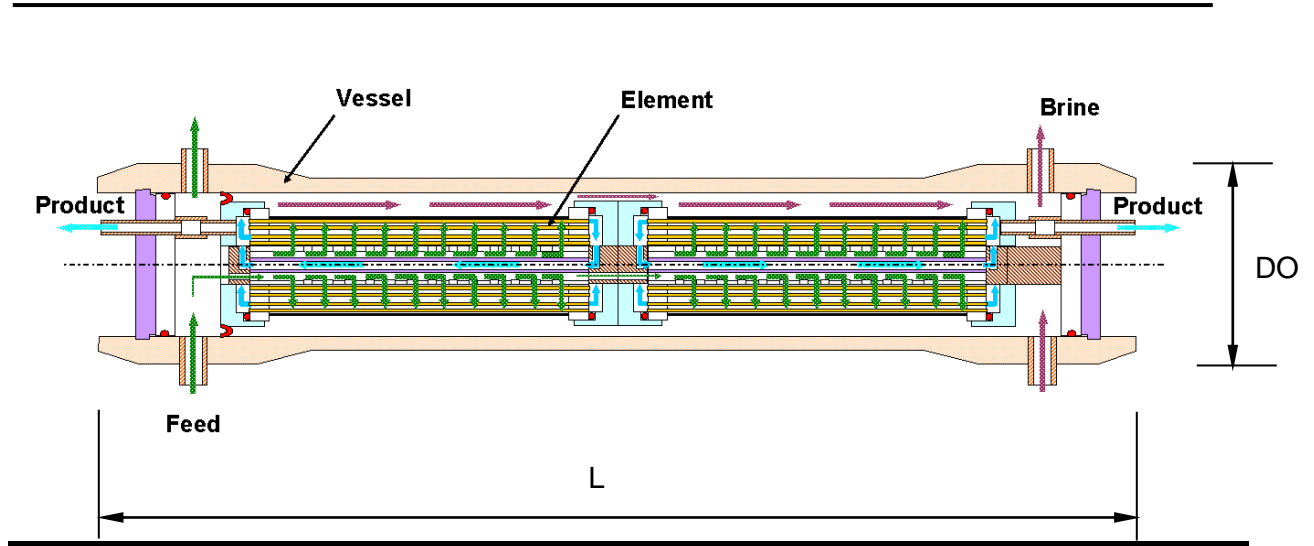

Module Dimension

Number of Element		2
Module size	Outer Diameter ,DO	380 mm
	Length ,L	4433 mm
Weight (Filled with water)		approx. 530 kg
Connection	Feed	Victaulic 3 inch
	Brine	Victaulic 3 inch
	Product	2-Victaulic 1 inch

The above dimensions are understood to be subject to change without prior announcement.